

TECHNICAL BULLETIN :

T0005

G2492 MK III Top Turn Glider Arm Design

As part of our continuous improvement programme in product development, Grorud have modified the shape and size of the G2492 top turn glider arm.


**This modification will result in a different centre sash casting position.
Please refer to the new Installation and Maintenance Instructions.**

1. The cut-out section has been modified to aid clearance between the arm and the bracket when in the wash position.


2. The overall length of the arm has been increased by
i) 4mm in the M8 to M10.5 range
ii) 6mm in the M11 to M13 range
iii) no change in the M13.5 to M18 range

3. All hinges using new arms will be packaged in a different carton (blue and white) with appropriate labelling.

Original Glider Arm

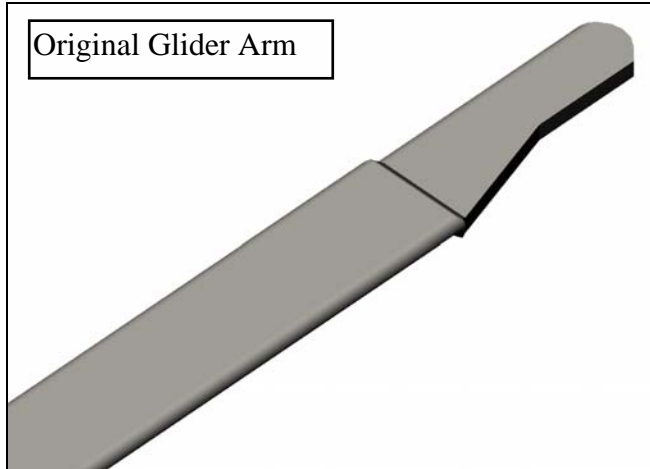

Modified Glider Arm

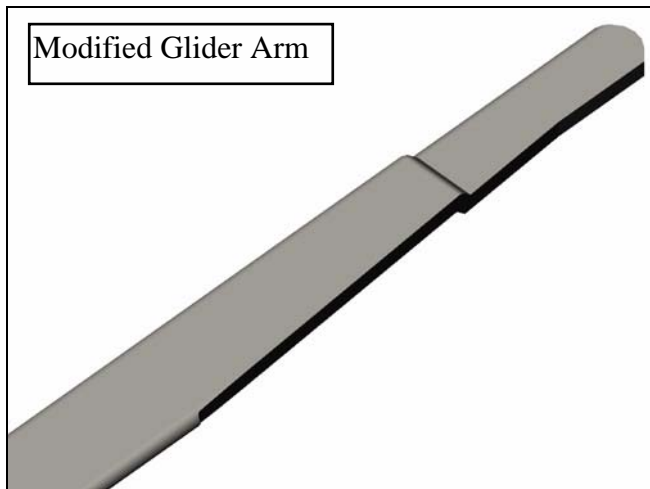

Date: _____

Signed : _____